




Uligedelt skydedør i lukket tilstand /
Unevenly divided sliding door in closed position

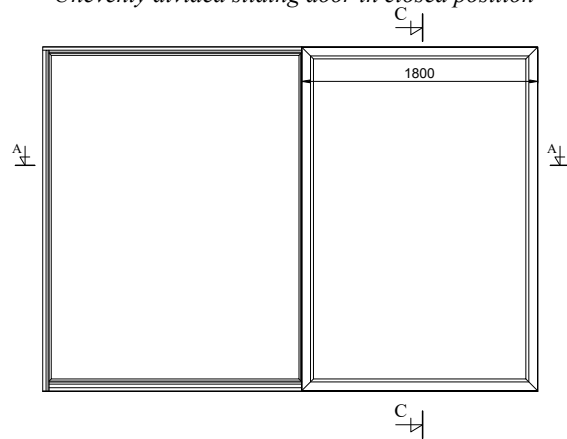


Lodret snit B/
Vertical section B

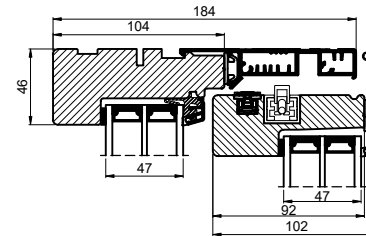



Lodret snit C/
Vertical section C

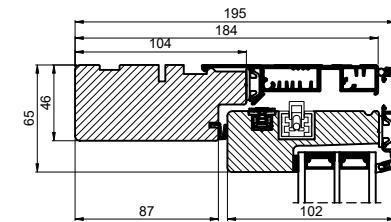




Uligedelt skydedør i lukket tilstand /
Unevenly divided sliding door in opened position

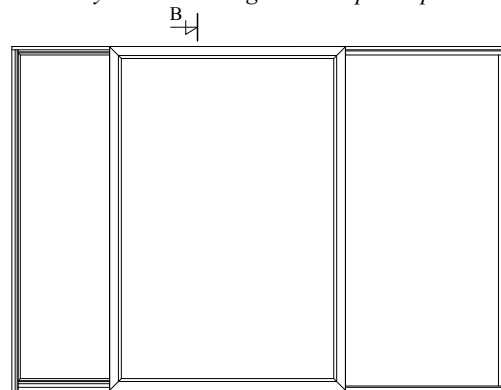

Uligedelt skydedør - Bredde 2148-3538 mm
Unevenly divided sliding - Width 2148-3538 mm

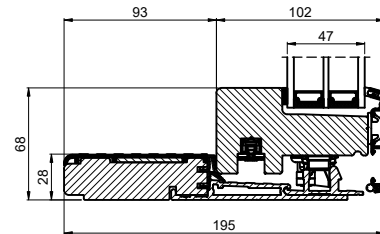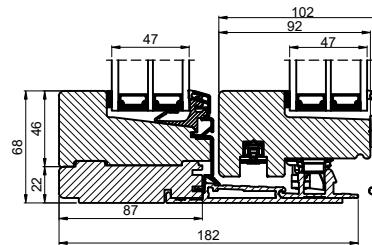


Vandret snit A/
Horizontal section A

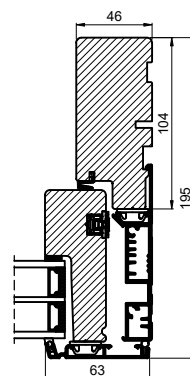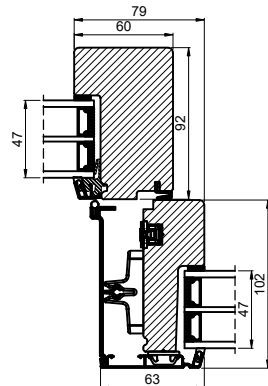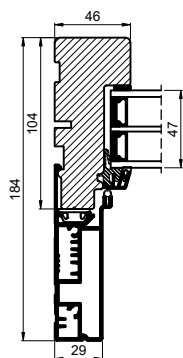


OBS! 184mm karm,
kræver 200mm sokkel/
NOTE! 184mm frame
requires a 200mm base.

Vigtigt!!

Scan QR kode og læs vejledning
før bestilling/
Scan the QR code and read
the instructions before ordering.



		Outline Vinduer A/S Fabrikvej 4 DK-9640 Farsø www.outline.dk
Tegn. nr.	300-18	Målestok
Int.		ARTGRU
Rev. nr.		01
Rev. dato.		2025-03-26
Benævnelse: Daylight 3-lags Uligedelt skydedør. Bredde: 2148-3538 mm		
Description: 3-layer Daylight Unevenly divided sliding door. Width: 2148-3538 mm		