




Uligedelt skydedør i lukket tilstand /
 Unevenly divided sliding door in closed position

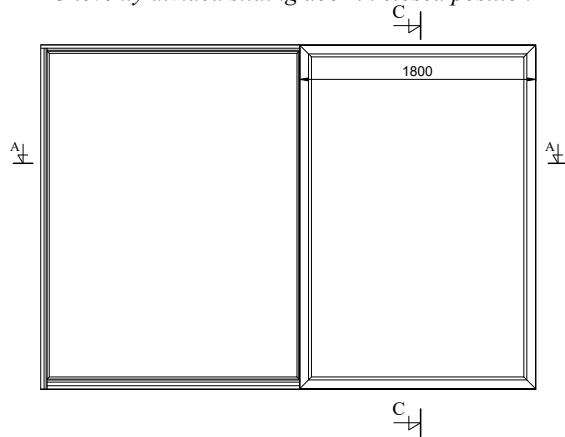


Lodret snit B/
 Vertical section B

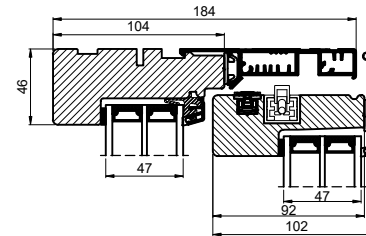



Lodret snit C/
 Vertical section C

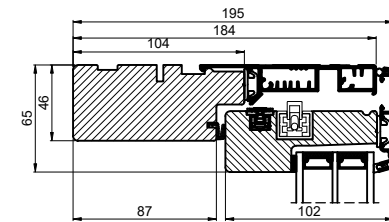




Uligedelt skydedør i lukket tilstand /
 Unevenly divided sliding door in opened position

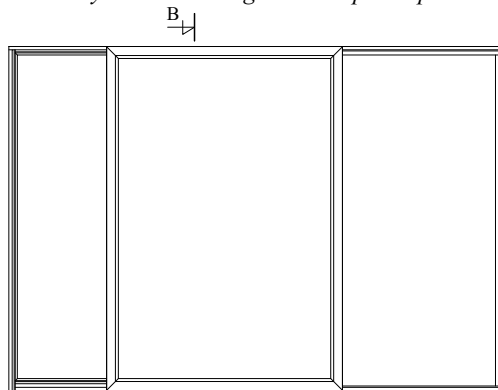

Uligedelt skydedør - Bredde 3543-4198 mm
 Gående ramme altid 1800 mm
 Unevenly divided sliding - Width 3543-4198 mm
 Active sash always 1800 mm

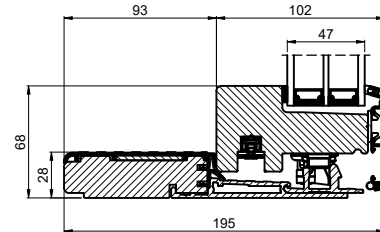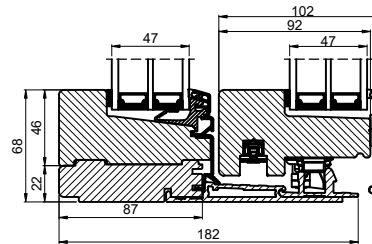


Vandret snit A/
 Horizontal section A

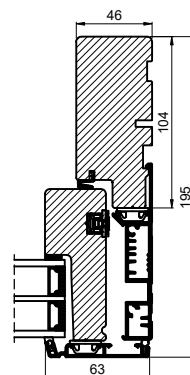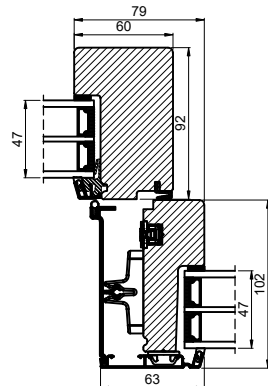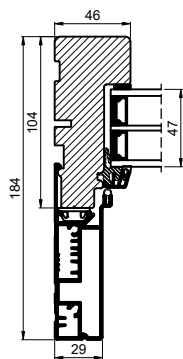


OBS! 184mm karm,
 kræver 200mm sokkel/
 NOTE! 184mm frame
 requires a 200mm base.

Vigtigt!!

Scan QR kode og læs vejledning
 før bestilling/
 Scan the QR code and read
 the instructions before ordering.



 Outline Vinduer A/S Fabrikvej 4 DK-9640 Farsø www.outline.dk		
Tegn. nr.	300-19	Målestok
Int.		ARTGRU
Rev. nr.		01
Rev. dato.		2025-03-26
Benævnelse: Daylight 3-lags Uligedelt skydedør. Bredde: 3543-4198 mm		
Description: 3-layer Daylight Unevenly divided sliding door. Width: 3543-4198 mm		